

CPX Container 60L cylindrical

The container has a substantial 150 mm O-ring sealed screw lid as standard. The well-protected lid located on top of the tank can be fitted with a lock (accessory). The container can be supplied with connections as required. Flat surface for mounting connections on the side of the tank. The lock insert for the 150 mm screw lid can be used on almost all lids.


Art.nr: 10061



Requires single door



Approximate size

Specifications	
Material	PE
Shape	Cylindrical
Bottom shape	Straight
Design	Closed
Lid type	150 mm O-ring sealed screw lid
Color	Natural
Volume (L)	60
Height (mm)	500
Diameter (mm)	450
Surface area (m2)	0.2
Weight (kg)	5
Tollstatistical code	3925100000
GTIN	7090046760788
Recycling	

Characteristics



Customizable containers



Recyclable



Wide temperature range



Chemical resistance



Leak test



Logistics solutions









Suitable for food contact



Easy to clean

Revision		
REV.	Ändringsmeddelande	Datum
		Godkänd

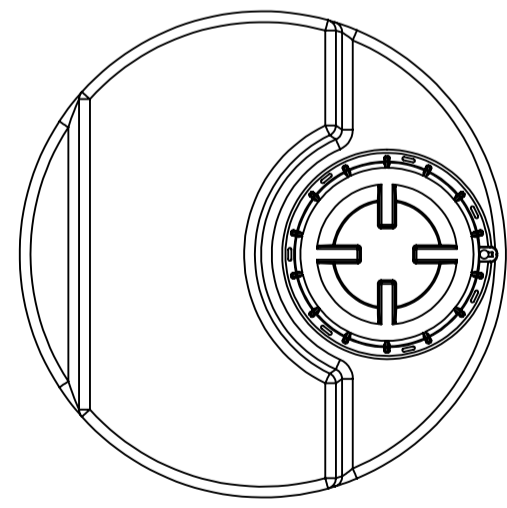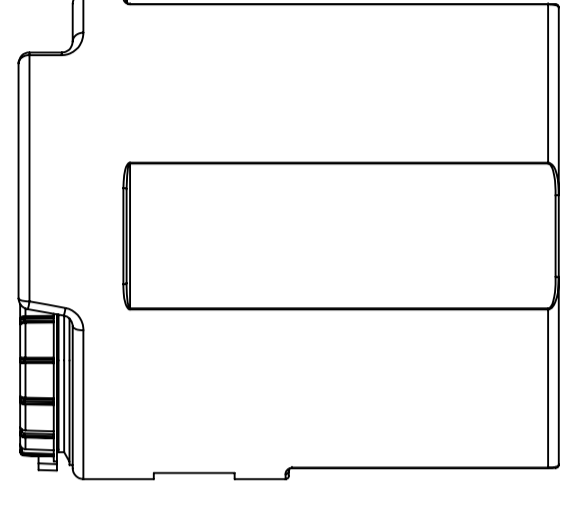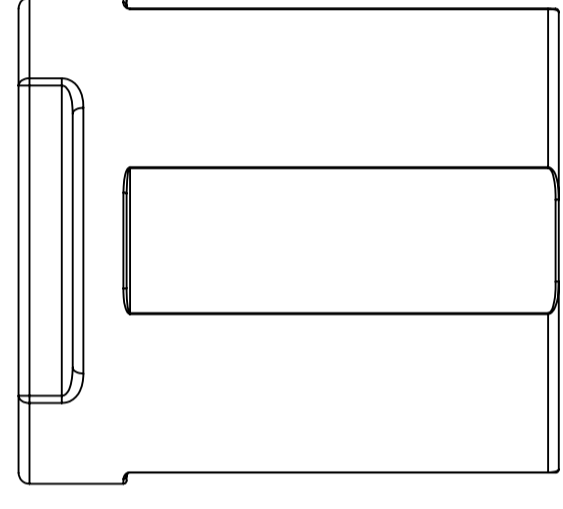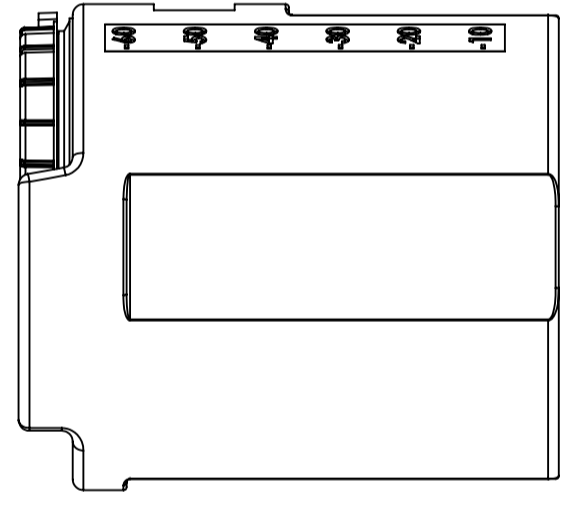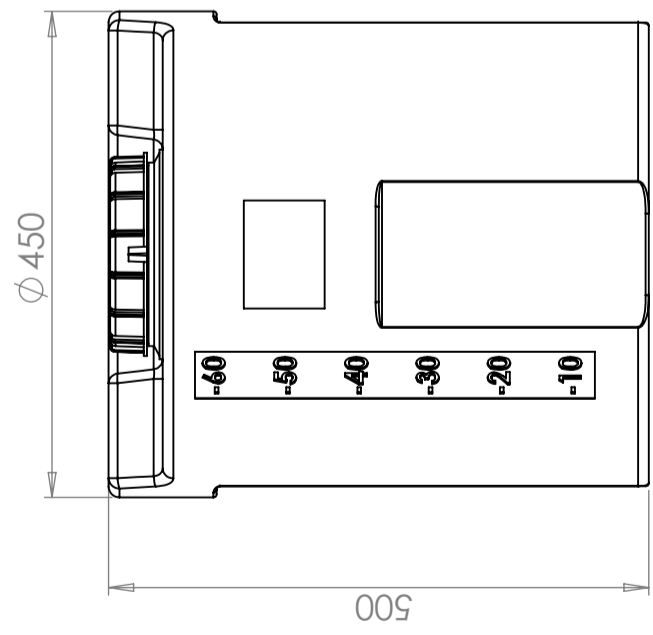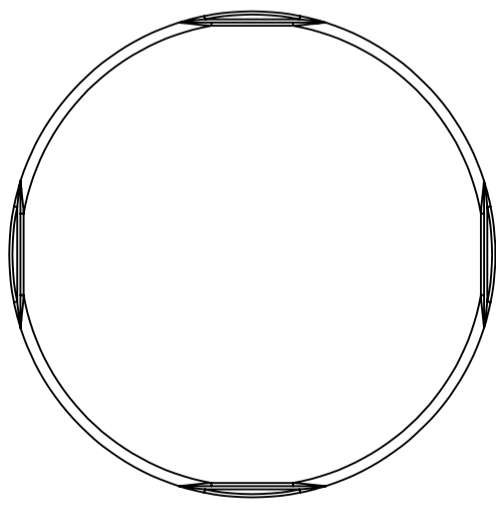

Generella toleranser om ej annat anges på ritning	Tillåtna avvikelser för längdbasmåtsområde. Gäller + 20°C			
General tolerances if not other stated on drawing	Permissible deviations for basic length size range. Be valid + 20°C			
	0-20	>20-75	>75-150	>150-300
	$\pm 0,5$ mm	± 1 mm	$\pm 1,5$ mm	$\pm 1,3$ %
				± 1 %

Konstruerad av	Granskad av	Godkänd av - datum	Generell tolerans SS-ISO 2768-1	Generell Ytjämnhet, Ra	Vyplacering	Skala
JA	JA	JA - 2014-09-16				1:7
Ägare	Titel/Benämning		Container 60 L			
	Ritningsnummer		10061			
	Utgåva		A			
	Blad		1(1)			

