


CPX Mooring bouy MB 60L natural incl rod

De ankerboei heeft een buitenmantel van slagvast polyethyleen dat is gevuld met freonvrij polystyreenschuim. Gatdiameter 60 mm.

Art.nr.: 30069



Specificaties	
Materiaal	PE
Kleur	Naturel
Inhoud (L)	60
Hoogte (mm)	330
Diameter (mm)	580
Gatdiameter (mm)	60
Recycling	 HDPE

Eigenschappen



Aanpasbaar



Recyclebaar



Breed
temperatuurber
eik:




Aangepast voor
eten



Makkelijk
schoon te
maken

Revision	Reason of change	Date	Approved

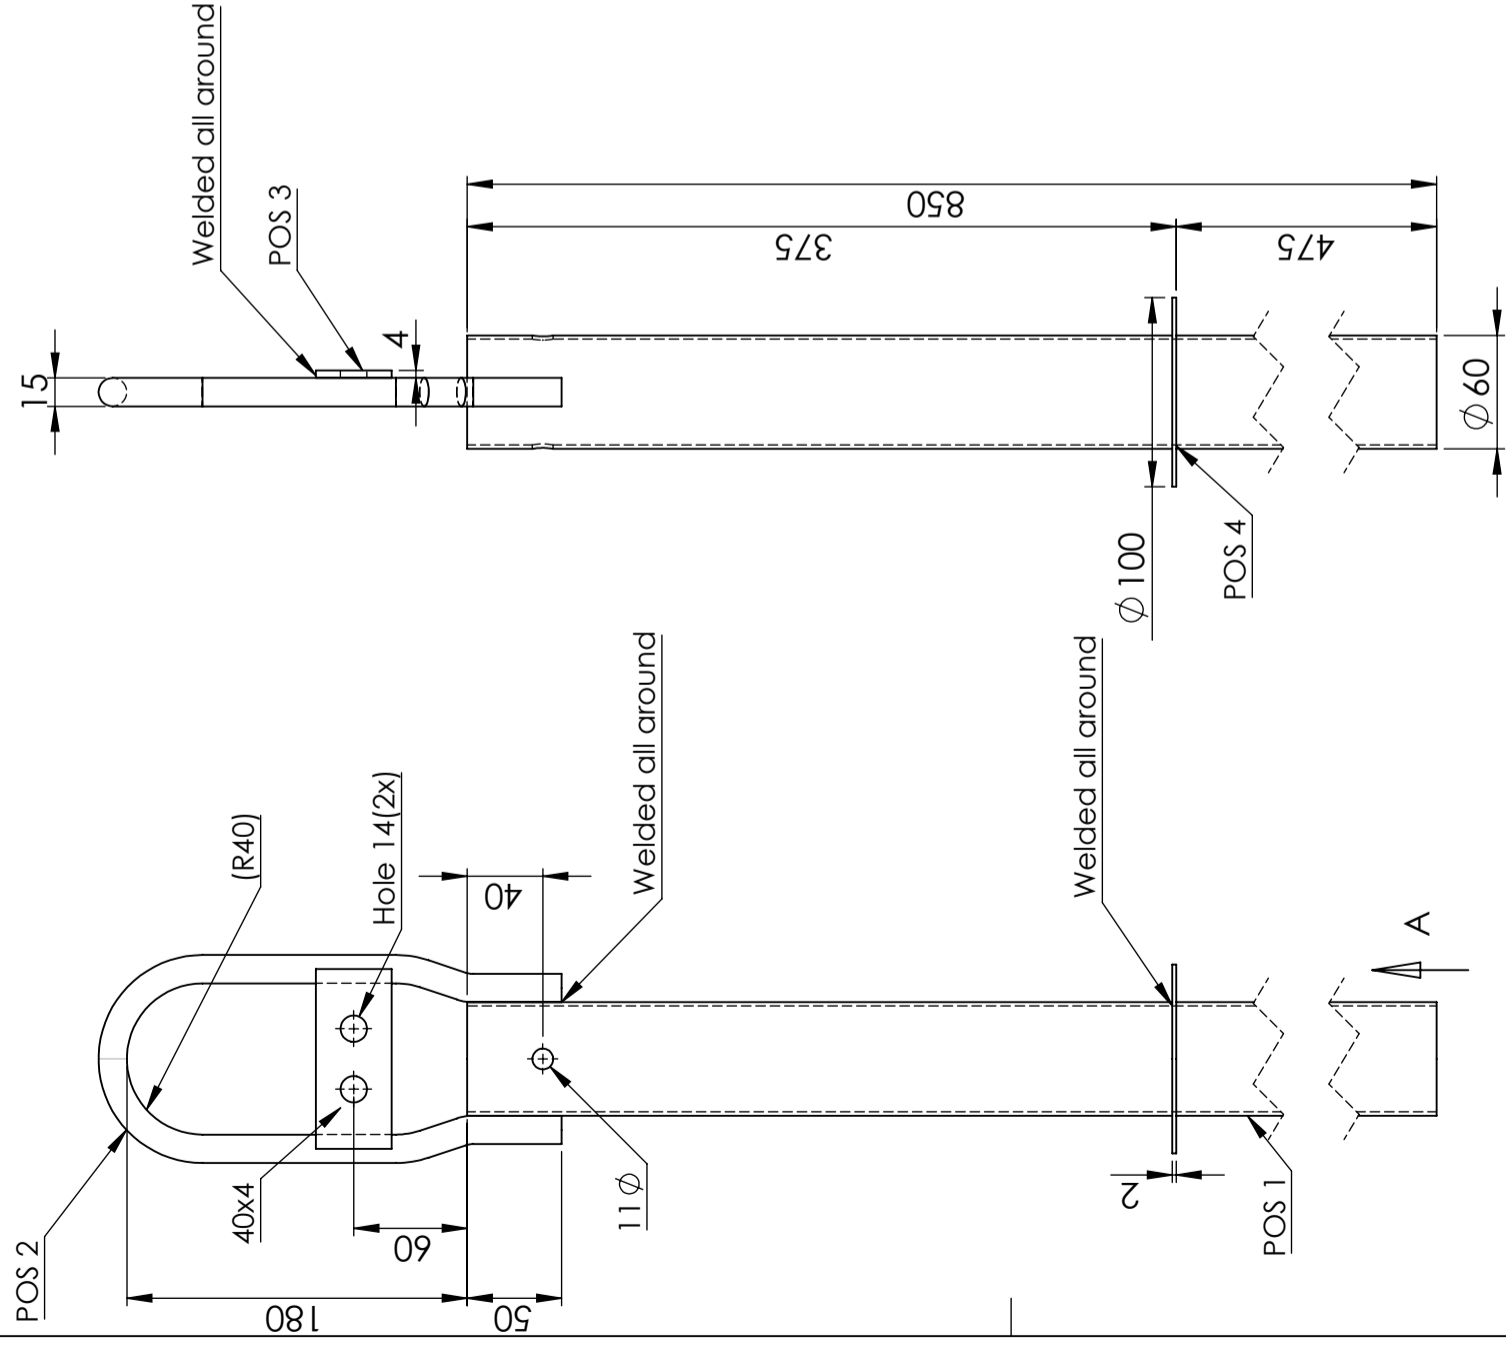


- POS 1
tube Material: EN 10305-3 (DIN 2394). t: 2 mm
- POS 2
rod Material: EN 10125 Fe 360B. ϕ 15
- POS 3
Plate Material: EN 10125 FE 360B. t: 4 mm
- POS 4
Plate Material: EN 10130 FeP01. t: 2 mm

Coating: Fe/Zn 115 ISO 1461.
 DETAIL C
 SCALE 1 : 2 SECTION B-B

The bolt / nut / washer shall be assembled on each bouyrod

A	B	C
Bolt ISO 4014 DIN 931 FZV	NUT DIN 985 FZV	Washer 30x30x3 S4B FZV DIN 436
M10 x 80 62357	1	M10 Nyloc 62355
1	1	1
QTY	QTY	QTY
62357	62355	62364
1	1	2

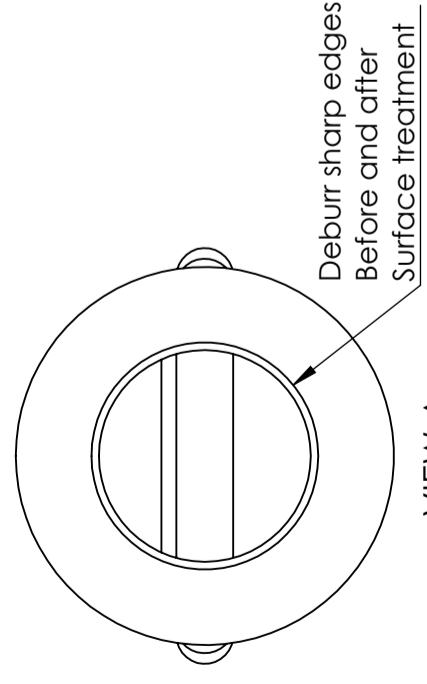

This drawing and design is the property of CIPax.
 Copying and distribution of the drawing or any contents
 is prohibited without written permission from authorised
 personal at CIPax

Designed by	Inspected by	Approved by - Date	General tolerance SS-ISO 2768-1	General surface finish, Ra	View position	Scale
		-	G	G		1:10
Owner	Title/Name					
	Bojten 62210 60 LIT					
	Drawing Number					
	62210					
	Edition					
	A					
	Page					
	1(1)					

