

CPX Sewage system



Extension necks to CPX underground tanks with flexible installation depth.

Can be combined with each other for precise depth. The table below shows the installation depths for closed tanks and septic tanks in combination with the different extension necks.

CPX Extension necks Including mounting kit.




Article number: 450251
Size: Ø 600 mm
Height: 250 mm




Article number: 450501
Size: Ø 600 mm
Height: 400 mm



Article number: 450121
Size: Ø 600 mm
Height: 550 mm

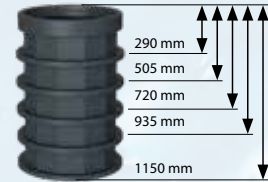

Article number: 450211
Size: Ø 600 mm
Height: Cut to size 290-1150 mm

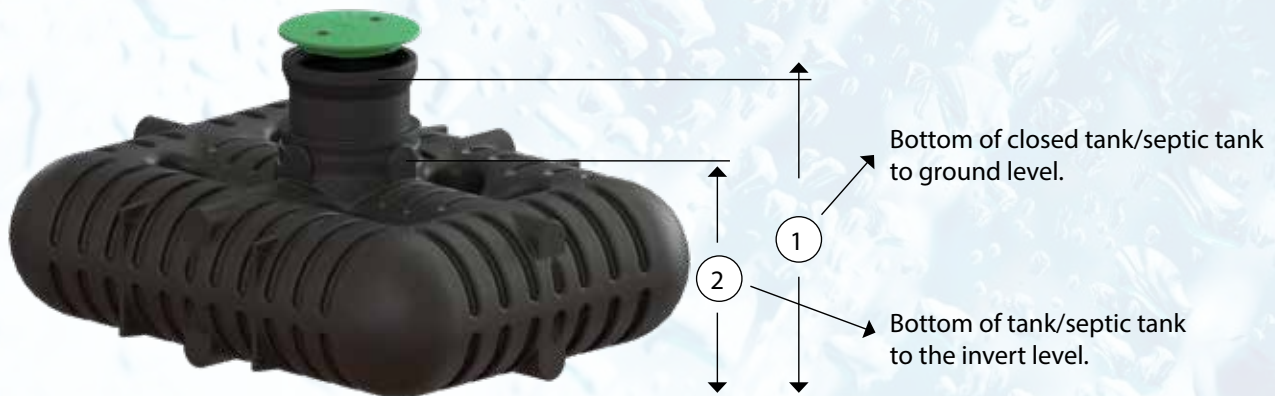

CPX Locking ring for lid

Article number: 45020
Size: Ø 600 mm



* Required locking ring for lid directly on tank.

Child proof lid is included with the tank.
Mounting kit with screw and sealing paste is included with the extension necks and for locking ring.

		Without extension neck ① Height (mm)	With extension neck 250 mm ① Height (mm)	With extension neck 400 mm ① Height (mm)	With extension neck 550 mm ① Height (mm)	With cut to size extension neck 290 - 1150 mm ① Height (mm)	Maximum installation depth Height (mm)
Tank 1350L	② Invert level: not pre-drilled	1000	1250	1400	1550	1290-2150	2000
Tank 3000L	② Invert level: not pre-drilled	1350*	1550	1750	1900	1640-2500	1950
Tank 3000L (low built)	② Invert level: 770 mm	1000	1250	1400	1550	1290-2250	1735
Tank 4000L (low built)	② Invert level: 755 mm	960	1210	1360	1510	1250-2110	1910
Tank 5000L (low built)	② Invert level: 955 mm	1160	1410	1560	1710	1450-2310	2110
Tank 6000L (low built)	② Invert level: 1004 mm	1175	1425	1575	1725	1465-2325	1920
Septic tank 1200L	② Invert level: 780 mm	1000	1250	1400	1550	1290-2150	2000
Septic tank 2200L	② Invert level: 768 mm	1350*	1550	1750	1900	1640-2500	2900
Septic tank 3200L	② Invert level: 758 mm	960	1210	1360	1510	1250-2110	3000
Septic tank 4200L	② Invert level: 958 mm	1160	1410	1560	1710	1450-2310	3000